

PRTECTOR



TABLE OF CONTENTS:

3. WHAT IS "PROTECTOR"?

4. MAINTENANCE & FEATURES

5. SIZING AND PERFORMANCE

6. DIMENSIONS



WHAT IS "PROTECTOR"?

The IWTM Protector™ is a range of unique side stream filtration devices that engineers the system water to a non-corrosive state. It provides corrosion protection in both new and existing heating and cooling systems, by removing sludge, particles, oxygen, and other corrosive products. Therefore, the system is maintained in the best possible way, by constantly filtering and engineering the water using electrochemistry and anode technology. The result is that it's cleaning and engineering the water at the same time.

IWTM Protector™ Digital uses the same technology as our analogue range, but as well as protecting your water system, Protector Digital also constantly collects live data, which can be used to analyse what is happening in the system and provide advanced warning of the need to perform preventive maintenance, thus saving you time and money.


NEXT GENERATION OF ELECTROCHEMISTRY

The units provide faster clean-up of old systems and quicker compliance with pre commissioning targets on new systems due to the higher flow rates through the reaction tank (cathode) and the inbuilt stainless steel micron filter that enables finer filtration. The unscreened larger anodes last longer and release the magnesium hydroxide quicker for faster pH control. Compliance with VDI 2035 is still obtained as the anodes sit inside the basket to capture the magnesium residue when the anodes expire.

HOW DOES IT WORK?

The water enters from the inlet connection, then passes around and down, past magnets and anodes. The dry internal magnets will prevent the filter basket from clogging up as the magnet sleeve will retain the magnetic particles (magnetite) in place until the magnet is removed for cleaning and blow down. During this process, oxygen will be consumed by dissolving the anodes, and excess air will rise up and out of the vent valve. The water will now flow through the ss micron filter / filter bag so that particles will physically be stopped by either of the filters. The result will be clear water with controlled alkaline pH, without oxygen or particles and sludge.

- Protector is an "all in one solution"
- Controls the three key parameters of VDI 2035 ; pH, conductivity & dissolved oxygen.
- Creates a hostile environment for bacteria
- Keeps the water clean in closed circulation systems and removes all particles and impurities

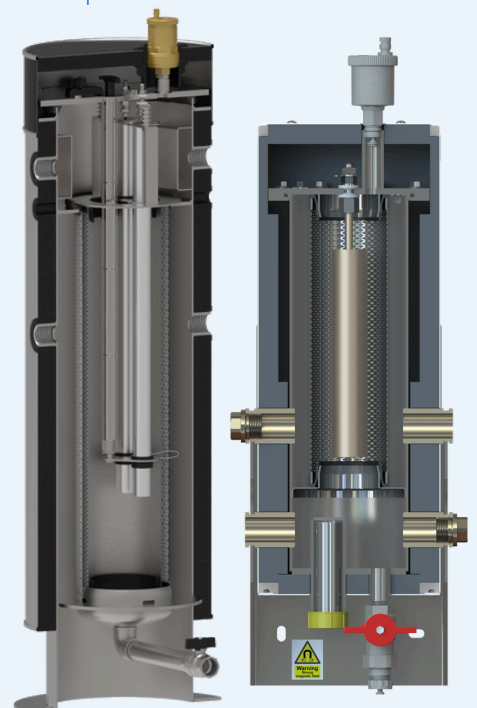

MAINTENANCE & FEATURES

MAINTENANCE

When the progressive build-up of suspended solids retained by the stainless-steel micron filter causes an excessive increase of pressure differential between the inlet and outlet connections, the ss micron filter must be cleaned.

To perform the cleaning operations, there are two options either a normal backflush of the filter, or by complete removal and washing of the filter. The ss micron filter can be used to remove chemicals and, inhibitors but works well with organic glycol.

FILTERS

Each ss micron filter contains neodymium magnets to retain ferrous particles, magnesium anodes to consume oxygen and increase the pH value, and a stainless-steel filter element (40µm) or bag filter (various micron sizes, down to 1 µm, not applicable for P1-P5 or P70) to filtrate the water and remove any suspended solids.

The two filter types are entirely interchangeable.

Protector is completely insulated and cladded to prevent heat loss and condensation: it is installed as a side stream device only.



P10 - P70 VALVE KIT


Each P10 - P70 unit from the Protector range is supplied with a bespoke valve kit, which will be packed inside the Protector box.



P1 - P5 VALVE KIT

UK Installation Kit *(also available for outside UK)*

P2-P5 all times, P1 when used in side stream

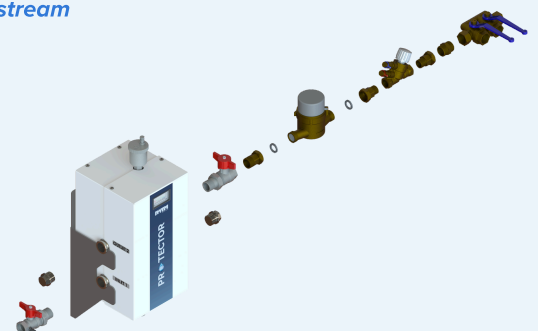

SIZING & PERFORMANCE


Model	Max Pressure	Max temp	HEATING		COOLING	
			Max System Volume up to Litres	System kW Guide	Max System Volume up to Litres	System kW Guide
P1	10 bar	95°C	1000	91	700	47
P2	10 bar	95°C	2000	182	1400	94
P5	10 bar	95°C	5000	455	3500	233
P10	10 bar	95°C	10,000	900	7000	466
P25	10 bar	95°C	25,000	2272	17,500	1175
P40	10 bar	95°C	40,000	3600	30,000	2000
P70	10 bar	95°C	70,000	6364	60,000	4000

*Protector Digital available for P10-P70.
See Protector Digital Brochure for more information.*



DIMENSIONS

Protector Unit	Dry Weight (Kg)	Full Weight (Kg)	Height	Width
P1	7.0	7.9	431 mm	155 mm
P2	9.1	11.2	509 mm	180 mm
P5	10.6	13.7	633 mm	180 mm
P10	33kg	52kg	800 mm	294 mm
P25	58kg	81kg	1200 mm	340 mm
P40	70kg	116kg	1200 mm	390 mm
P70	120kg	218kg	1465 mm	530 mm

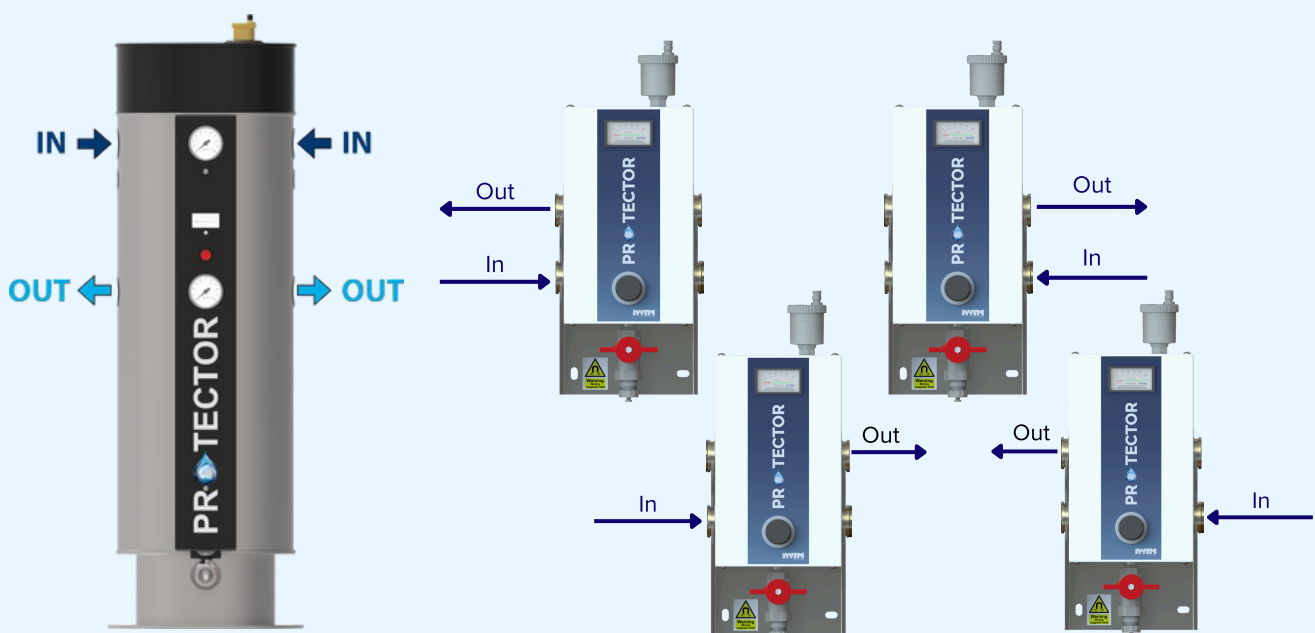




Environmental Culture Change

be a part of it

clean | protect | prevent

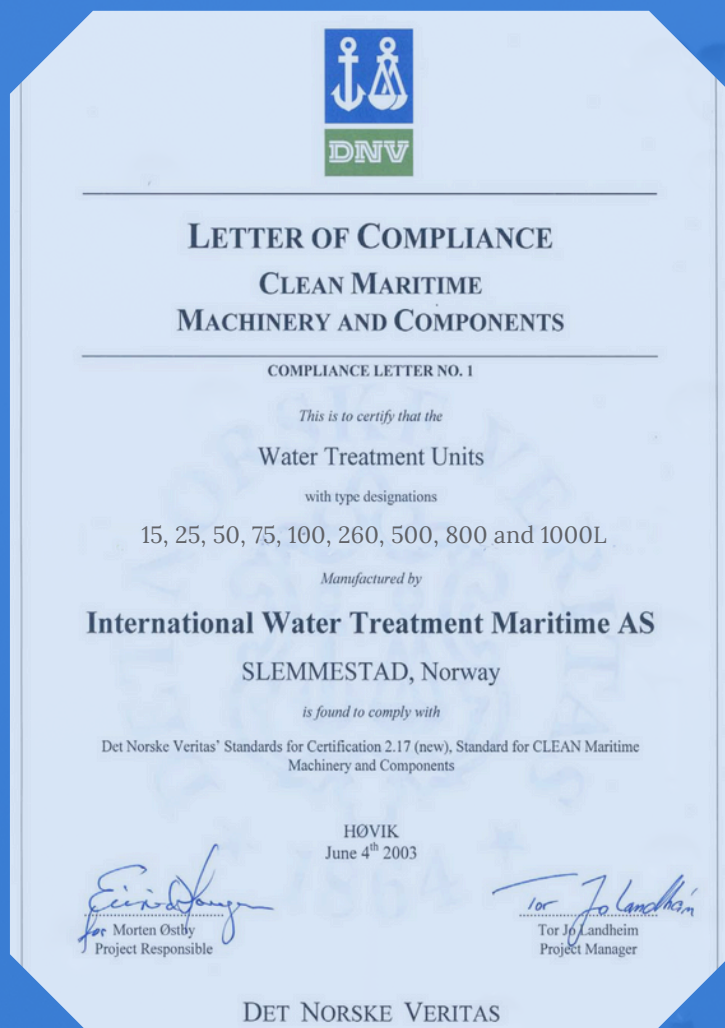

Founded in 1992, IWTM have been working with chemical free water treatment using electrochemistry for over 30 years and have offices in Norway, UK, Finland, Sweden, Canada, USA and a worldwide presence in the Marine sector.

We have developed models specifically suited to the higher demands of the marine industry operating at higher pressures and higher temperatures.

The marine products are provided worldwide on the world's largest cruise ships working with the leading operators in this sector.

Having secured DNV approval in 2003, we are still the only chemical free water treatment manufacturer to have this certification and approval. DNV is a globally leading quality assurance and risk management company operating in more than 100 countries.

The IWTM Protector™ is our most recently developed product. The Protector range is now available to our land-based customers.

SUTTON BUSINESS CENTRE
RESTMOR WAY WALLINGTON
SM6 7AH

WWW.IWTM-UK.COM
T: +44 208 255 2903
E: INFO@IWTM-UK.COM